


Specifications

Current rating: 0.5~1A AC,DC
 Voltage rating: 50V AC,DC
 Temperature range: -25°C ~ +85°C
 Contact resistance: 20mΩ Max.
 Insulation resistance: 100MΩ Min.
 Withstanding voltage: 500V AC/minute
 Contact E.N for Details

Standards



Assembly layout

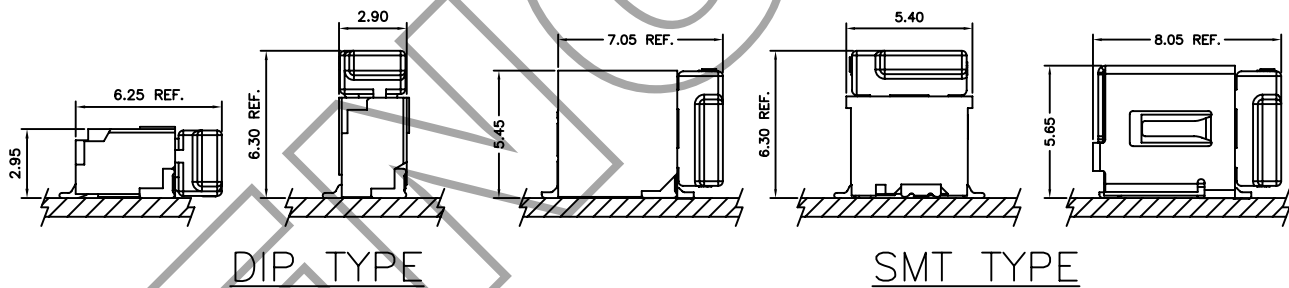

Ordering code

A1001 - I P
 ① ② ③

- ① Series No.
- ② Plating code: T=Tin-plated, G=Gold-flash
- ③ Material: P=Phosphor bronze

A1001 WR A -S - 2XNP
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Connector type: WV=Vertical, WR=Right angle
- ③ Blank=Normal type, A=Shell type
- ④ Mounting type: SF=SMT with boss
S=SMT without boss
- ⑤ Blank=Single row, 2X=Dual row
- ⑥ No. of circuits


A1001 H - 2XNP
 ① ② ③ ④

- ① Series No.
- ② H=Housing
- ③ Blank=Single row, 2X=Dual row
- ④ No. of circuits

A1001-T — 1.00mm pitch Crimp Terminal

Reference Informations:

*Mates with E.N A1001 series Housing

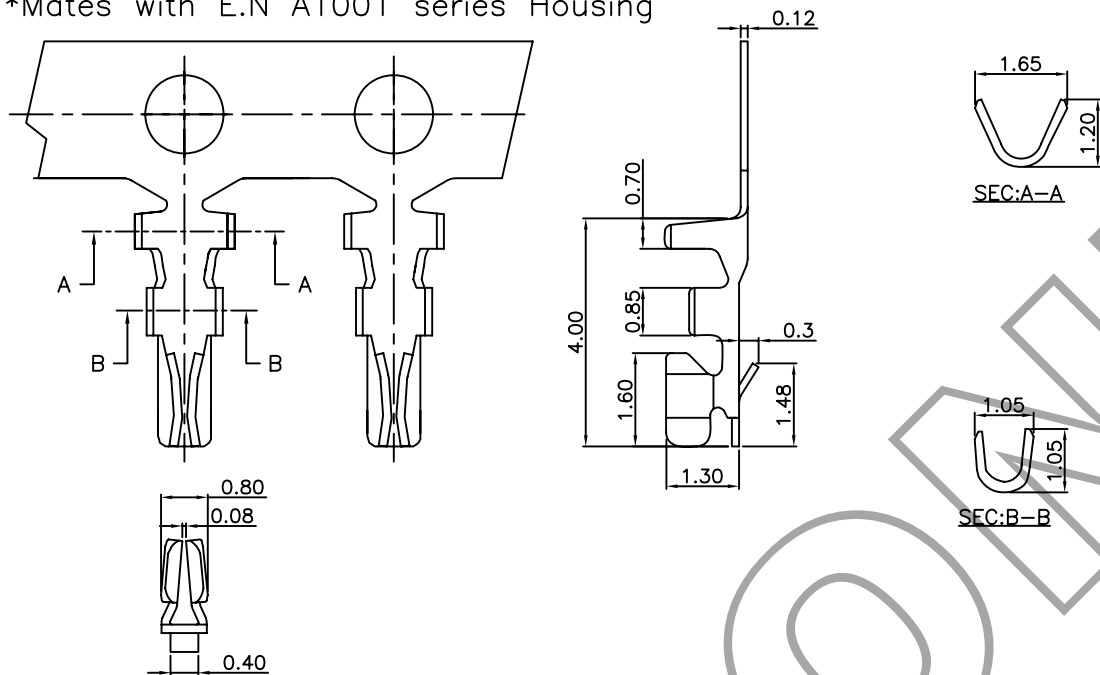

Ordering Information & Specifications

Unit: mm

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1001-TP	AWG#28-#32	0.80mm(max)	Phosphor Bronze	Tin-plated	10,000pcs
A1001-PT	AWG#28-#32	0.80mm(max)	Phosphor Bronze	Tin-plated	10,000pcs





A1001H — 1.00mm pitch Housing

Reference Informations:

*Material: PA66&PBT,UL94V-0

*Suitable E.N A1001 series Terminal

*Mates with E.N A1001 series Wafer

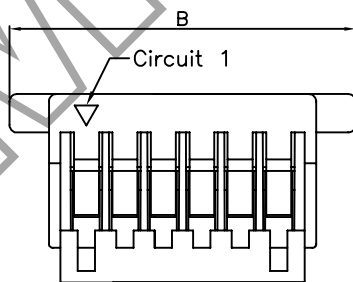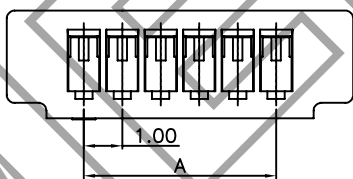

Ordering Information & Dimensions



PART NO.	Dimensions	
	A	B
A1001H-02P	1.00	5.00
A1001H-03P	2.00	6.00
A1001H-04P	3.00	7.00
A1001H-05P	4.00	8.00
A1001H-06P	5.00	9.00
A1001H-07P	6.00	10.00
A1001H-08P	7.00	11.00
A1001H-09P	8.00	12.00
A1001H-10P	9.00	13.00
A1001H-11P	10.00	14.00
A1001H-12P	11.00	15.00
A1001H-13P	12.00	16.00
A1001H-14P	13.00	17.00
A1001H-15P	14.00	18.00
A1001H-16P	15.00	19.00
A1001H-17P	16.00	20.00
A1001H-18P	17.00	21.00
A1001H-19P	18.00	22.00
A1001H-20P	19.00	23.00

Unit: mm

A1001WR-S — 1.00mm pitch 90° Wafer — SMT TYPE

Reference Informations:

- *Material: Pin: Phosphor Bronze/Tin-plated
Solder Tabs: Brass/Tin-plated
Wafer: LCP,UL94V-0
- *Mates with E.N A1001 series Housing

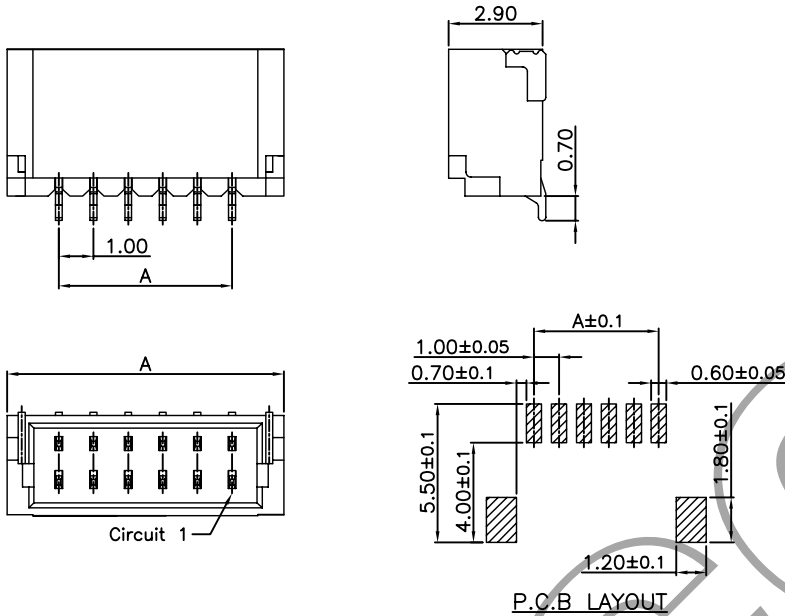

Ordering Information & Dimensions



PART NO.	Dimensions	
	A	B
A1001WR-S-02P	1.00	4.00
A1001WR-S-03P	2.00	5.00
A1001WR-S-04P	3.00	6.00
A1001WR-S-05P	4.00	7.00
A1001WR-S-06P	5.00	8.00
A1001WR-S-07P	6.00	9.00
A1001WR-S-08P	7.00	10.00
A1001WR-S-09P	8.00	11.00
A1001WR-S-10P	9.00	12.00
A1001WR-S-11P	10.00	13.00
A1001WR-S-12P	11.00	14.00
A1001WR-S-13P	12.00	15.00
A1001WR-S-14P	13.00	16.00
A1001WR-S-15P	14.00	17.00
A1001WR-S-16P	15.00	18.00
A1001WR-S-17P	16.00	19.00
A1001WR-S-18P	17.00	20.00
A1001WR-S-19P	18.00	21.00
A1001WR-S-20P	19.00	22.00

Unit: mm

A1001WV-S — 1.00mm pitch 180° Wafer — SMT TYPE

Reference Informations:

- *Material: Pin: Phosphor Bronze/Tin-plated
Solder Tabs: Brass/Tin-plated
Wafer: LCP,UL94V-0
- *Mates with E.N A1001 series Housing

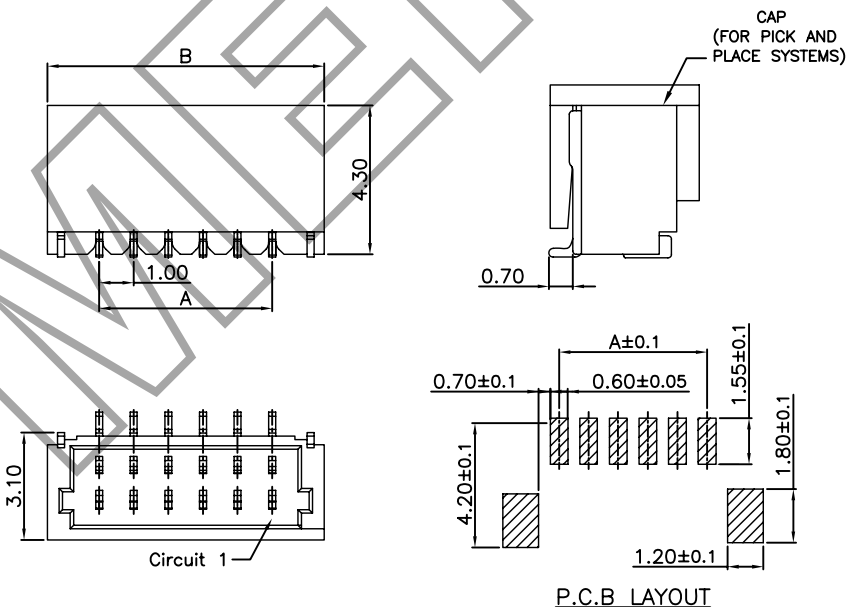

Ordering Information & Dimensions




PART NO.	Dimensions	
	A	B
A1001WV-S-02P	1.00	4.00
A1001WV-S-03P	2.00	5.00
A1001WV-S-04P	3.00	6.00
A1001WV-S-05P	4.00	7.00
A1001WV-S-06P	5.00	8.00
A1001WV-S-07P	6.00	9.00
A1001WV-S-08P	7.00	10.00
A1001WV-S-09P	8.00	11.00
A1001WV-S-10P	9.00	12.00
A1001WV-S-11P	10.00	13.00
A1001WV-S-12P	11.00	14.00
A1001WV-S-13P	12.00	15.00
A1001WV-S-14P	13.00	16.00
A1001WV-S-15P	14.00	17.00
A1001WV-S-16P	15.00	18.00
A1001WV-S-17P	16.00	19.00
A1001WV-S-18P	17.00	20.00
A1001WV-S-19P	18.00	21.00
A1001WV-S-20P	19.00	22.00

Unit: mm

A1001H-2X — 1.00mm pitch Dual Row Housing

Reference Informations:

- *Material: PA66&PBT,UL94V-0
- *Suitable E.N A1001 series Terminal
- *Mates with E.N A1001 series Dual Row Wafer

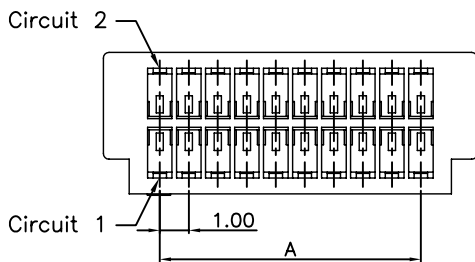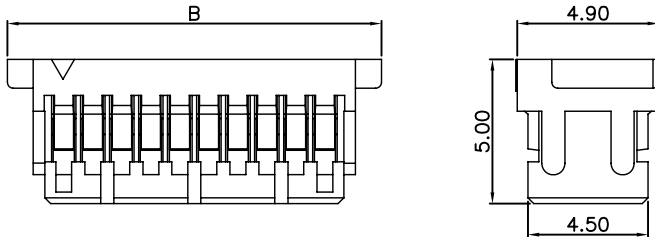

Ordering Information & Dimensions



PART NO.	Dimensions	
	A	B
A1001H-2X06P	5.00	9.00
A1001H-2X08P	7.00	11.00
A1001H-2X10P	9.00	13.00
A1001H-2X15P	14.00	18.00
A1001H-2X20P	19.00	23.00
A1001H-2X25P	24.00	28.00

Unit: mm

A1001WR-S-2X 1.00mm pitch 90° Dual Row Wafer —SMT TYPE

Reference Informations:

- *Material: Pin: Brass/Tin-plated & Gold flash
- Solder Tabs: Brass/Tin-plated
- Wafer: LCP,UL94V-0
- *Mates with E.N A1001 series Dual Row Housing

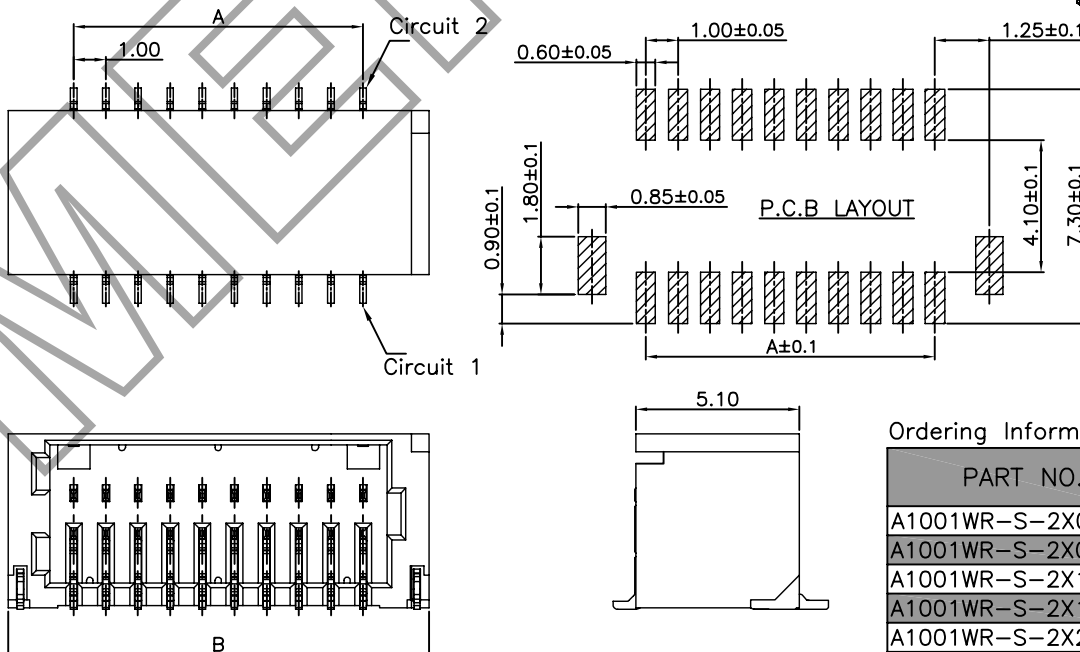

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A1001WR-S-2X06P	5.00	9.00
A1001WR-S-2X08P	7.00	11.00
A1001WR-S-2X10P	9.00	13.00
A1001WR-S-2X15P	14.00	18.00
A1001WR-S-2X20P	19.00	23.00
A1001WR-S-2X25P	24.00	28.00






Unit: mm

A1001WR-S-2X 1.00mm pitch 180° Dual Row Wafer -SMT TYPE-

Reference Informations:

- *Material: Pin: Brass/Tin-plated & Gold flash
- Solder Tabs: Brass/Tin-plated
- Wafer: LCP,UL94V-0

*Mates with E.N A1001 series Dual Row Housing

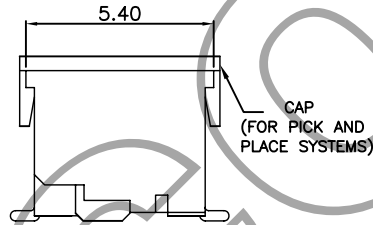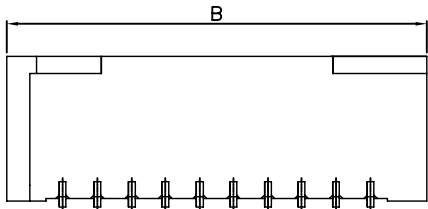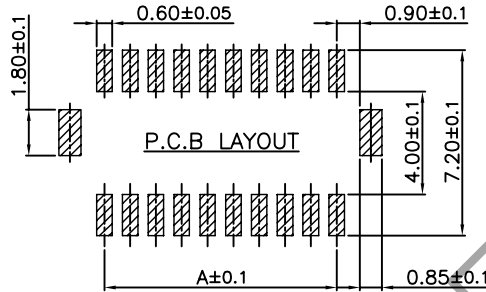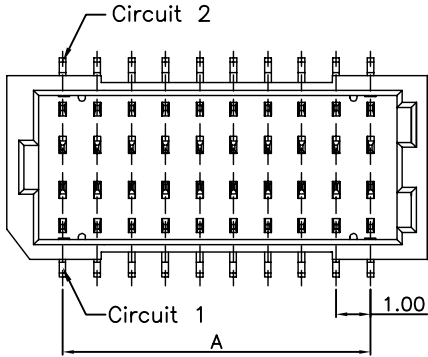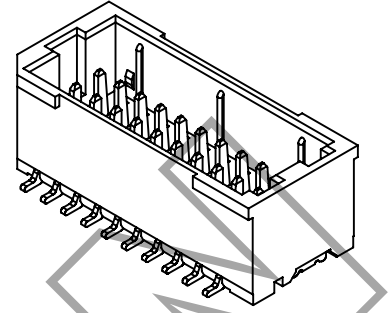

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A1001WV-S-2X06P	5.00	9.00
A1001WV-S-2X08P	7.00	11.00
A1001WV-S-2X10P	9.00	13.00
A1001WV-S-2X15P	14.00	18.00
A1001WV-S-2X20P	19.00	23.00
A1001WV-S-2X25P	24.00	28.00

Unit: mm